

## Numerical-analytical method for solving initial-boundary value problem for loaded parabolic equation

A.T. Assanova<sup>1,2</sup>, Zh.M. Kadirbayeva<sup>1,2,\*</sup>, S.K. Kuanysh<sup>3</sup>

<sup>1</sup>*Institute of Mathematics and Mathematical Modeling, Almaty, Kazakhstan;*

<sup>2</sup>*Kazakh National Women's Teacher Training University, Almaty, Kazakhstan;*

<sup>3</sup>*Al-Farabi Kazakh National University Almaty, Kazakhstan*

(E-mail: [assanova@math.kz](mailto:assanova@math.kz), [zhkadirbayeva@gmail.com](mailto:zhkadirbayeva@gmail.com), [saule270898@gmail.com](mailto:saule270898@gmail.com))

An initial-boundary value problem for a loaded parabolic equation in a rectangular domain was considered. By discretization with respect to a spatial variable, the problem under study is reduced to the initial problem for a system of loaded ordinary differential equations. Based on the previously obtained results of Dzhumabaev and Assanova, an estimate for the solution of the original initial-boundary value problem for a loaded parabolic equation was established. An auxiliary initial problem for a system of loaded ordinary differential equations is solved by the Dzhumabaev parameterization method. Conditions of the unique solvability of the considering problem are obtained and algorithms for finding a solution are constructed. The results are illustrated with a numerical example.

*Keywords:* loaded parabolic equations, initial-boundary value problem, solvability conditions, parameterization method, polygonal method, numerical solution.

*2020 Mathematics Subject Classification:* 35K20, 34K10, 35R10, 65M22.

### Introduction

The parabolic partial differential equations play a very important role in many branches of science and engineering. Applied problems involving boundary value problems for parabolic equations include: thermal analysis in engineering, groundwater flow, climate modeling, biological processes, chemical reactions, environmental engineering, material science and financial engineering [1–5].

Loaded parabolic equations are a type of parabolic partial differential equations that include additional terms or conditions representing external influences or interactions, which can vary over time and space. These “loads” can be functions or integrals that are added to the standard parabolic equation. Loaded parabolic equations often arise in various physical and engineering applications where external sources, sinks, or other dynamic interactions need to be modeled [6]. These equations are used to model more complex systems where simple diffusion or heat conduction is modified by additional processes such as external forces, reaction terms, or other dynamic effects. For information on various boundary value problems for loaded parabolic differential equations, refer to works [7–11].

A boundary value problem for a linear parabolic equation without loading was considered in works [12, 13]. Using the polygonal method, estimates of the solution and their derivatives were obtained in terms of the equation coefficients and boundary conditions [12]. Coefficient estimates of solutions and the first derivative with respect to  $x$  of a linear boundary value problem for a parabolic equation with one spatial variable were obtained [13].

\*Corresponding author. E-mail: [zhkadirbayeva@gmail.com](mailto:zhkadirbayeva@gmail.com)

This research is funded by the Science Committee of the Ministry of Science and Higher Education of the Republic of Kazakhstan (Grant No. AP19675193).

Received: 25 July 2024; Accepted: 12 November 2024.

© 2025 The Authors. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

The numerical research of boundary value problems for a parabolic equations with and without loading are of great interest due to their broad range of applications. Several methods for solving these problems have been developed [14–18].

This work is aimed at development of methods for solving the initial-boundary value problem for parabolic equation, proposed in [12, 13] to the initial-boundary value problem for a loaded parabolic equation of the following form

$$\frac{\partial u}{\partial t} = p(t, x) \frac{\partial^2 u}{\partial x^2} + q(t, x)u(t, x) + \sum_{j=1}^{m+1} k_j(t, x)u(\xi_j, x) + f(t, x), \quad (t, x) \in \Omega = (0, T) \times (0, \omega), \quad (1)$$

$$u(0, x) = \varphi(x), \quad x \in [0, \omega], \quad (2)$$

$$u(t, 0) = \psi_0(t), \quad u(t, \omega) = \psi_1(t), \quad t \in [0, T], \quad (3)$$

where functions  $p(t, x) > 0$ ,  $q(t, x) \leq 0$ ,  $m \in \mathbb{N}$ ,  $k_j(t, x)$ ,  $j = \overline{1, m+1}$ ,  $f(t, x)$  are continuous with respect to  $t$  and Holder continuous with respect to  $x$ ; functions  $\varphi(x)$ ,  $\psi_0(t)$ ,  $\psi_1(t)$  are sufficiently smooth and  $\psi_0(0) = \varphi(0)$ ,  $\psi_1(0) = \varphi(\omega)$  matching conditions are performed.

A solution to problem (1)–(3) is a function  $u(t, x)$ , continuous on  $\overline{\Omega} = [0, T] \times [0, \omega]$  that has continuous first-order partial derivatives with respect to  $t$  and continuous second-order partial derivatives with respect to  $x$ . It satisfies the loaded differential equation (1) and boundary conditions (2), (3).

By discretizing with respect to the spatial variable  $x$ , problem (1)–(3) transforms to a problem for systems of loaded ordinary differential equations. An auxiliary problem for a system of loaded ordinary differential equations will be investigated. Based on the properties of solutions to the auxiliary problem, estimates for the solution of the original initial-boundary value problem for the loaded parabolic equation will be established. In this case, the approach proposed in works [12, 13] will be used. A numerical method for solving the initial problem for systems of loaded ordinary differential equations is also proposed. A numerical implementation of the algorithm for the initial-boundary value problem for a loaded parabolic equation is presented. The error between the exact solution of the problem under consideration and its numerical discrete solution has been established.

### 1 Problem formulation

We take  $\forall \tau$  and produce a discretization by variable  $x$ :  $x_i = i\tau$ ,  $i = \overline{0, N}$ ,  $N\tau = \omega$ .

We present the following notations:  $u_i(t) = u(t, i\tau)$ ,  $p_i(t) = p(t, i\tau)$ ,  $q_i(t) = q(t, i\tau)$ ,  $k_j^i(t) = k_j(t, i\tau)$ ,  $j = \overline{1, m}$ ,  $f_i(t) = f(t, i\tau)$ ,  $\varphi_i = \varphi(i\tau)$ ,  $i = \overline{0, N}$ .

Using these notations, the problem (1)–(3) is transformed into the following problem

$$\frac{du_i}{dt} = p_i(t) \frac{u_{i+1} - 2u_i + u_{i-1}}{\tau^2} + q_i(t)u_i + \sum_{j=1}^{m+1} k_j^i(t)u_i(\xi_j) + f_i(t), \quad i = \overline{1, N-1}, \quad (4)$$

$$u_i(0) = \varphi_i, \quad i = \overline{1, N-1}, \quad (5)$$

$$u_0(0) = \varphi_0, \quad u_N(0) = \varphi_N, \quad u_0(t) = \psi_0(t), \quad u_N(t) = \psi_1(t), \quad t \in [0, T]. \quad (6)$$

Here from relation (6) it is clear that functions  $u_0(t)$  and  $u_N(t)$  are known.

Due to the linearity of the system for  $\forall \tau > 0$  there is a unique solution to problem (4)–(6) defined on  $[0, T]$ :  $\{u_1(t), u_2(t), \dots, u_{N-1}(t)\}$ . Relating the functions  $u_{i+1}$ ,  $u_{i-1}$  to the right side of each  $i$ -th

equation of system (4), we apply the estimate from work [19]

$$\begin{aligned} \|u_i\| &= \max_{t \in [0, T]} \{|u_i(t)|\} \leq \max \left\{ |\varphi_i|, \frac{1}{2} \left\| \frac{u_{i-1}(t)}{1 + \frac{|q_i(t)|\tau^2}{2p_i(t)}} \right\| + \frac{1}{2} \left\| \frac{u_{i+1}(t)}{1 + \frac{|q_i(t)|\tau^2}{2p_i(t)}} \right\| \right. \\ &\quad \left. + \frac{1}{2} \left\| \frac{f_i(t)}{p_i(t) \left[ 1 + \frac{|q_i(t)|\tau^2}{2p_i(t)} \right]} \right\| \tau^2 + \frac{1}{2} \left\| \frac{\sum_{j=1}^{m+1} k_j^i(t) u_i(\xi_j)}{p_i(t) \left[ 1 + \frac{|q_i(t)|\tau^2}{2p_i(t)} \right]} \right\| \tau^2 \right\} \\ &\leq \max \left\{ |\varphi_i|, \frac{1}{2} \|u_{i-1}\| + \frac{1}{2} \|u_{i+1}\| + \frac{1}{2} \max_{t \in [0, T]} \left\| \frac{f_i(t)}{p_i(t)} \right\| \tau^2 + \frac{1}{2} \max_{t \in [0, T]} \left\| \frac{\sum_{j=1}^{m+1} k_j^i(t) u_i(\xi_j)}{p_i(t)} \right\| \tau^2 \right\}. \end{aligned}$$

From here it is easy to obtain the following inequality

$$\eta_i \leq \frac{1}{2} \eta_{i-1} + \frac{1}{2} \eta_{i+1} + \frac{1}{2} \max_{t \in [0, T]} \left\| \frac{f_i(t)}{p_i(t)} \right\| \tau^2 + \frac{1}{2} \max_{t \in [0, T]} \sum_{j=1}^{m+1} \left\| \frac{k_j^i(t)}{p_i(t)} \right\| \cdot \|u_i\| \tau^2, \quad i = \overline{1, N-1}, \quad (7)$$

where  $\eta_i = \max \{\hat{\varphi}, \|u_i\|\}$ ,  $\hat{\varphi} = \max_{i=1, N} \{|\varphi_i|\}$ .

Similarly to [12, 13], using the sweep down and up from (7), we get

$$\begin{aligned} \eta_i &\leq \frac{N-i}{N} \eta_0 + \frac{i}{N} \eta_N + \frac{N-i}{N} \sum_{l=1}^i \max_{t \in [0, T]} \left\| l \frac{f_l(t)}{p_l(t)} \right\| \tau^2 + \frac{i}{N} \sum_{l=i+1}^{N-1} \max_{t \in [0, T]} \left\| (N-l) \frac{f_l(t)}{p_l(t)} \right\| \tau^2 \\ &\quad + \frac{N-i}{N} \sum_{l=1}^i \sum_{j=1}^{m+1} \max_{t \in [0, T]} \left\| l \frac{k_j^l(t)}{p_l(t)} \right\| \tau^2 \cdot \eta_i + \frac{i}{N} \sum_{l=i+1}^{N-1} \sum_{j=1}^{m+1} \max_{t \in [0, T]} \left\| (N-l) \frac{k_j^l(t)}{p_l(t)} \right\| \tau^2 \cdot \eta_i. \end{aligned}$$

Considering that  $\|u_i\| \leq \eta_i$ , we set

$$\begin{aligned} \|u_i\| &\leq \frac{N-i}{N} \max\{\hat{\varphi}, \|\psi_0\|\} + \frac{i}{N} \max\{\hat{\varphi}, \|\psi_1\|\} + \frac{N-i}{N} \sum_{l=1}^i \max_{t \in [0, T]} \left\| l \frac{f_l(t)}{p_l(t)} \right\| \tau^2 \\ &\quad + \frac{i}{N} \sum_{l=i+1}^{N-1} \max_{t \in [0, T]} \left\| (N-l) \frac{f_l(t)}{p_l(t)} \right\| \tau^2 + \Theta_i \|u_i\|, \quad (8) \end{aligned}$$

where  $\Theta_i = \frac{N-i}{N} \sum_{l=1}^i \sum_{j=1}^{m+1} \max_{t \in [0, T]} \left\| l \frac{k_j^l(t)}{p_l(t)} \right\| \tau^2 + \frac{i}{N} \sum_{l=i+1}^{N-1} \sum_{j=1}^{m+1} \max_{t \in [0, T]} \left\| (N-l) \frac{k_j^l(t)}{p_l(t)} \right\| \tau^2 < 1$ .

Then

$$\begin{aligned} \|u_i\| &\leq \frac{1}{1 - \Theta_i} \left\{ \frac{N-i}{N} \max\{\varphi, \|\psi_0\|\} + \frac{i}{N} \max\{\varphi, \|\psi_1\|\} \right. \\ &\quad \left. + \frac{N-i}{N} \sum_{l=1}^i \max_{t \in [0, T]} \left\| l \frac{f_l(t)}{p_l(t)} \right\| \tau^2 + \frac{i}{N} \sum_{l=i+1}^{N-1} \max_{t \in [0, T]} \left\| (N-l) \frac{f_l(t)}{p_l(t)} \right\| \tau^2 \right\}. \end{aligned}$$

From inequality (8), reasoning in the same way as in [13] and [19], we obtain the validity of the following statement:

*Theorem 1.* Let

a) the assumptions with respect to the data of problem (1)–(3) be fulfilled;

b) the inequality  $\Theta(x) = \frac{\omega-x}{\omega} \int_0^x z \sum_{j=1}^{m+1} \max_{t \in [0, T]} \left\| \frac{k_j(t, z)}{p(t, z)} \right\| dz + \frac{x}{\omega} \int_x^\omega (\omega - z) \sum_{j=1}^{m+1} \max_{t \in [0, T]} \left\| \frac{k_j(t, z)}{p(t, z)} \right\| dz < 1$  be

valid for all  $x \in [0, \omega]$ .

Then the problem (1)–(3) has a unique classical solution  $u^*(t, x)$ , and for it the following inequality holds:

$$\begin{aligned} \max_{t \in [0, T]} |u^*(t, x)| \leq & \frac{\omega - x}{\omega[1 - \Theta(x)]} \max \left\{ \max_{x \in [0, \omega]} |\varphi(x)|, \max_{t \in [0, T]} |\psi_0(t)| \right\} \\ & + \frac{x}{\omega[1 - \Theta(x)]} \max \left\{ \max_{x \in [0, \omega]} |\varphi(x)|, \max_{t \in [0, T]} |\psi_1(t)| \right\} \\ & + \frac{\omega - x}{\omega[1 - \Theta(x)]} \int_0^x z \max_{t \in [0, T]} \left\| \frac{f(t, z)}{p(t, z)} \right\| dz + \frac{x}{\omega[1 - \Theta(x)]} \int_x^\omega (\omega - z) \max_{t \in [0, T]} \left\| \frac{f(t, z)}{p(t, z)} \right\| dz. \end{aligned}$$

The proof of Theorem 1, with minor modifications, follows the same principles as the proof of Theorem in [13].

Thus, we have established an estimate for the solution of the original initial-boundary value problem of the loaded parabolic equation (1)–(3).

Substituting  $u_0(t)$  and  $u_N(t)$  into the system of loaded equations (4), the discretized problem (4)–(6) can be written in the following matrix-vector form

$$\frac{d\tilde{u}}{dt} = \mathcal{A}(t)\tilde{u} + \sum_{j=1}^{m+1} \mathcal{K}_j(t)\tilde{u}(\xi_j) + \mathcal{F}(t), \quad \tilde{u} \in \mathbb{R}^{N-1}, \quad t \in [0, T], \tag{9}$$

$$\tilde{u}(0) = \Phi, \quad \Phi \in \mathbb{R}^{N-1}, \tag{10}$$

where  $\tilde{u}(t) = (u_1(t), u_2(t), \dots, u_{N-1}(t))$  is unknown function, the  $(N - 1) \times (N - 1)$  matrices  $\mathcal{A}(t)$ ,  $\mathcal{K}_j(t)$ ,  $j = \overline{1, m + 1}$ , and  $(N - 1)$  vector-function  $\mathcal{F}(t)$  are continuous on  $[0, T]$ ,  $0 = \xi_0 < \xi_1 < \dots < \xi_m < \xi_{m+1} = T$ . Here

$$\mathcal{A}(t) = \begin{bmatrix} -\frac{2p_1(t)}{\tau^2} + q_1(t) & \frac{p_1(t)}{\tau^2} & 0 & \dots & 0 \\ \frac{p_2(t)}{\tau^2} & -\frac{2p_2(t)}{\tau^2} + q_2(t) & \frac{p_2(t)}{\tau^2} & \dots & 0 \\ 0 & \frac{p_3(t)}{\tau^2} & -\frac{2p_3(t)}{\tau^2} + q_3(t) & \dots & 0 \\ \dots & \dots & \dots & \ddots & \dots \\ 0 & 0 & 0 & \dots & -\frac{2p_{N-1}(t)}{\tau^2} + q_{N-1}(t) \end{bmatrix},$$

$$\mathcal{K}_j(t) = \begin{bmatrix} k_j^1(t) & 0 & 0 & \dots & 0 \\ 0 & k_j^2(t) & 0 & \dots & 0 \\ 0 & 0 & k_j^3(t) & \dots & 0 \\ \dots & \dots & \dots & \ddots & \dots \\ 0 & 0 & 0 & \dots & k_j^{N-1}(t) \end{bmatrix}, \quad j = \overline{1, m + 1},$$

$$\mathcal{F}(t) = \begin{bmatrix} \frac{p_1(t)}{\tau^2} \psi_0(t) + f_1(t) \\ f_2(t) \\ f_3(t) \\ \vdots \\ \frac{p_{N-1}(t)}{\tau^2} \psi_1(t) + f_{N-1}(t) \end{bmatrix}, \quad \Phi = \begin{bmatrix} \varphi_1 \\ \varphi_2 \\ \varphi_3 \\ \vdots \\ \varphi_{N-1} \end{bmatrix}.$$

A solution to problem (9), (10) is a vector function  $\tilde{u}(t)$ , which is continuous on  $[0, T]$  and continuously differentiable on  $(0, T)$ . This function satisfies the loaded differential equation (9) and the condition (10).

2 Solving problem (9), (10) by using the parameterization method

We will use the approach proposed in [20–24] to solve the initial value problem for loaded differential equations (9), (10). This approach relies on the algorithms of the Dzhumabaev parametrization method [19,25] and numerical methods. The implementation and efficiency of this method for finding analytical and numerical solutions to boundary value problems for various differential equations are shown in [26–32].

The interval  $[0, T]$  is partitioned into subintervals by loading points:  $[0, T] = \bigcup_{s=1}^{m+1} [\xi_{s-1}, \xi_s]$ .

Define the space  $C([0, T], \xi_s, \mathbb{R}^{(N-1)(m+1)})$  consisting of system functions  $\tilde{u}[t] = (\tilde{u}_1(t), \tilde{u}_2(t), \dots, \tilde{u}_{m+1}(t))$ , where each  $\tilde{u}_s : [\xi_{s-1}, \xi_s] \rightarrow \mathbb{R}^{N-1}$  is continuous on  $[\xi_{s-1}, \xi_s]$  and has finite left-sided limits  $\lim_{t \rightarrow \xi_s-0} \tilde{u}_s(t)$  for all  $s = \overline{1, m+1}$ . The norm on this space is defined as  $\|\tilde{u}[\cdot]\|_2 = \max_{s=\overline{1, m+1}} \sup_{t \in [\xi_{s-1}, \xi_s]} \|\tilde{u}_s(t)\|$ .

The restriction of the function  $\tilde{u}(t)$  to the interval  $[\xi_{s-1}, \xi_s]$  is denoted by  $\tilde{u}_s(t)$ , meaning  $\tilde{u}_s(t) = \tilde{u}(t)$  for  $t \in [\xi_{s-1}, \xi_s]$ ,  $s = \overline{1, m+1}$ . We introduce additional parameters  $\mu_s = \tilde{u}_{s+1}(\xi_s)$ ,  $s = \overline{1, m}$ ,  $\mu_{m+1} = \tilde{u}(\xi_{m+1})$ . By making the substitution  $\tilde{u}_1(t) = v_1(t) + \Phi$  on  $[\xi_0, \xi_1]$  and  $\tilde{u}_s(t) = v_s(t) + \mu_{s-1}$  on each interval  $[\xi_{s-1}, \xi_s]$ ,  $s = \overline{2, m+1}$ , we obtain multi-point initial value problem with parameters

$$\frac{dv_1}{dt} = \mathcal{A}(t)(v_1 + \Phi) + \sum_{j=1}^{m+1} \mathcal{K}_j(t)\mu_j + \mathcal{F}(t), \quad t \in [\xi_0, \xi_1], \tag{11}$$

$$\frac{dv_s}{dt} = \mathcal{A}(t)(v_s + \mu_{s-1}) + \sum_{j=1}^{m+1} \mathcal{K}_j(t)\mu_j + \mathcal{F}(t), \quad t \in [\xi_{s-1}, \xi_s], \quad s = \overline{2, m+1}, \tag{12}$$

$$v_s(\xi_{s-1}) = 0, \quad s = \overline{1, m+1}, \tag{13}$$

$$\Phi + \lim_{t \rightarrow \xi_1-0} v_1(t) = \mu_1, \tag{14}$$

$$\mu_{s-1} + \lim_{t \rightarrow \xi_s-0} v_s(t) = \mu_s, \quad s = \overline{2, m+1}. \tag{15}$$

A pair  $(v^*[t], \mu^*)$ , where the elements are  $v^*[t] = (v_1^*(t), v_2^*(t), \dots, v_{m+1}^*(t)) \in C([0, T], \xi_s, \mathbb{R}^{(N-1)(m+1)})$ ,  $\mu^* = (\mu_1^*, \mu_2^*, \dots, \mu_{m+1}^*) \in \mathbb{R}^{(N-1)(m+1)}$ , is said to be a solution to problem (11)–(15) if the functions  $v_s^*(t)$ ,  $s = \overline{1, m+1}$ , are continuously differentiable on  $[\xi_{s-1}, \xi_s]$  and satisfy (11), (12) and additional conditions (14), (15) with  $\mu_j = \mu_j^*$ ,  $j = \overline{1, m+1}$ , and initial conditions (13).

Problems (9), (10) and (11)–(15) are equivalent. If the  $\tilde{u}^*(t)$  is a solution of problem (9), (10), then the pair  $(v^*[t], \mu^*)$ , where  $v^*[t] = (\tilde{u}^*(t) - \Phi, \tilde{u}^*(t) - \tilde{u}^*(\xi_1), \dots, \tilde{u}^*(t) - \tilde{u}^*(\xi_m))$ , and  $\mu^* = (\tilde{u}^*(\xi_1), \tilde{u}^*(\xi_2), \dots, \tilde{u}^*(\xi_m), \tilde{u}^*(\xi_{m+1}))$ , is a solution to problem (11)–(15). Conversely, if the pair  $(\tilde{v}[t], \tilde{\mu})$  with elements  $\tilde{v}[t] = (\tilde{v}_1(t), \tilde{v}_2(t), \dots, \tilde{v}_{m+1}(t)) \in C([0, T], \xi_s, \mathbb{R}^{(N-1)(m+1)})$ ,  $\tilde{\mu} = (\tilde{\mu}_1, \tilde{\mu}_2, \dots, \tilde{\mu}_{m+1}) \in \mathbb{R}^{(N-1)(m+1)}$  is a solution to problem (11)–(15), then the function  $\tilde{u}(t)$  defined by the equalities  $\tilde{u}(t) = \tilde{v}_1(t) + \Phi$ ,  $t \in [\xi_0, \xi_1]$ ,  $\tilde{u}(t) = \tilde{v}_s(t) + \tilde{\mu}_{s-1}$ ,  $t \in [\xi_{s-1}, \xi_s]$ ,  $s = \overline{2, m+1}$ , and  $\tilde{u}(T) = \tilde{\mu}_{m+1}$ , will be the solution of the original problem (9), (10).

By employing the fundamental matrix  $\mathcal{X}_s(t)$  of differential equation  $\frac{d\tilde{u}}{dt} = \mathcal{A}(t)\tilde{u}$  on  $[\xi_{s-1}, \xi_s]$ ,  $s = \overline{1, m+1}$ , we transform the solution of an initial value problem for a differential equations with parameters (11)–(13) into an equivalent system of integral equations:

$$v_1(t) = \mathcal{X}_1(t) \int_{\xi_0}^t \mathcal{X}_1^{-1}(\eta) \mathcal{A}(\eta) d\eta \cdot \Phi + \mathcal{X}_1(t) \int_{\xi_0}^t \mathcal{X}_1^{-1}(\eta) \sum_{j=1}^{m+1} \mathcal{K}_j(\eta) d\eta \mu_j + \mathcal{X}_1(t) \int_{\xi_0}^t \mathcal{X}_1^{-1}(\eta) \mathcal{F}(\eta) d\eta, \quad t \in [\xi_0, \xi_1], \tag{16}$$

$$v_s(t) = \mathcal{X}_s(t) \int_{\xi_{s-1}}^t \mathcal{X}_s^{-1}(\eta) \mathcal{A}(\eta) d\eta \cdot \mu_{s-1} + \mathcal{X}_s(t) \int_{\xi_{s-1}}^t \mathcal{X}_s^{-1}(\eta) \sum_{j=1}^{m+1} \mathcal{K}_j(\eta) d\eta \mu_j + \mathcal{X}_s(t) \int_{\xi_{s-1}}^t \mathcal{X}_s^{-1}(\eta) \mathcal{F}(\eta) d\eta, \quad t \in [\xi_{s-1}, \xi_s], \quad s = \overline{2, m+1}. \tag{17}$$

By substituting the respective expressions from (16), (17) into the conditions (14) and (15), we get a system of linear algebraic equations with respect to the parameters  $\mu_s$ ,  $s = \overline{1, m+1}$ :

$$\mathcal{X}_1(\xi_1) \int_{\xi_0}^{\xi_1} \mathcal{X}_1^{-1}(\eta) \sum_{j=1}^{m+1} \mathcal{K}_j(\eta) d\eta \mu_j - \mu_1 = -\Phi - \mathcal{X}_1(\xi_1) \int_{\xi_0}^{\xi_1} \mathcal{X}_1^{-1}(\eta) \mathcal{A}(\eta) d\eta \cdot \Phi - \mathcal{X}_1(\xi_1) \int_{\xi_0}^{\xi_1} \mathcal{X}_1^{-1}(\eta) \mathcal{F}(\eta) d\eta, \tag{18}$$

$$\mu_{s-1} + \mathcal{X}_s(\xi_s) \int_{\xi_{s-1}}^{\xi_s} \mathcal{X}_s^{-1}(\eta) \mathcal{A}(\eta) d\eta \cdot \mu_{s-1} - \mu_s + \mathcal{X}_s(\xi_s) \int_{\xi_{s-1}}^{\xi_s} \mathcal{X}_s^{-1}(\eta) \sum_{j=1}^{m+1} \mathcal{K}_j(\eta) d\eta \mu_j = -\mathcal{X}_s(\xi_s) \int_{\xi_{s-1}}^{\xi_s} \mathcal{X}_s^{-1}(\eta) \mathcal{F}(\eta) d\eta, \quad t \in [\xi_{s-1}, \xi_s], \quad s = \overline{2, m+1}. \tag{19}$$

Unknown parameters  $\mu_s$ ,  $s = \overline{1, m+1}$  can be found using the system (18), (19). Using  $O \in \mathbb{R}^{N-1, N-1}$  zero matrix,  $I \in \mathbb{R}^{N-1, N-1}$  identity matrix and

$$y_s(B, t) = \mathcal{X}_s(t) \int_{\xi_{s-1}}^t \mathcal{X}_s^{-1}(\eta) B(\eta) d\eta, \quad s = \overline{1, m}$$

notations, we write system (18), (19) in the following form

$$Q_*(\xi) \mu = F_*(\xi), \quad \mu \in \mathbb{R}^{(N-1)(m+1)}, \tag{20}$$

where

$$Q_*(\xi) = \begin{bmatrix} y_1(\mathcal{K}_1, \xi_1) - I & y_1(\mathcal{K}_2, \xi_1) & y_1(\mathcal{K}_3, \xi_1) & \dots & y_1(\mathcal{K}_{m+1}, \xi_1) \\ I + y_2(\mathcal{A}, \xi_2) + y_2(\mathcal{K}_1, \xi_2) & y_2(\mathcal{K}_2, \xi_2) - I & y_2(\mathcal{K}_3, \xi_2) & \dots & y_2(\mathcal{K}_{m+1}, \xi_2) \\ y_3(\mathcal{K}_1, \xi_3) & I + y_3(\mathcal{A}, \xi_3) + y_3(\mathcal{K}_2, \xi_3) & y_3(\mathcal{K}_3, \xi_3) - I & \dots & y_3(\mathcal{K}_{m+1}, \xi_3) \\ \dots & \dots & \dots & \ddots & \dots \\ y_{m+1}(\mathcal{K}_1, \xi_{m+1}) & y_{m+1}(\mathcal{K}_2, \xi_{m+1}) & y_{m+1}(\mathcal{K}_3, \xi_{m+1}) & \dots & y_{m+1}(\mathcal{K}_{m+1}, \xi_{m+1}) - I \end{bmatrix},$$

$$F_*(\xi) = \left( -\Phi - y_1(\mathcal{A}, \xi_1)\Phi - y_1(\mathcal{F}, \xi_1), -y_2(\mathcal{F}, \xi_2), \dots, -y_m(\mathcal{F}, \xi_m), -y_{m+1}(\mathcal{F}, \xi_{m+1}) \right)'$$

It can be readily shown that solving the boundary value problem (9), (10) is equivalent to solving the system (20).

*Theorem 2.* Let the matrix  $Q_*(\xi) : \mathbb{R}^{(N-1)(m+1)} \rightarrow \mathbb{R}^{(N-1)(m+1)}$  be invertible. Then, for any  $\mathcal{F}(t)$  and  $\Phi \in \mathbb{R}^{(N-1)}$ , the problem (9), (10) has a unique solution  $\tilde{u}^*(t)$  and this solution satisfies the estimate

$$\|\tilde{u}^*\|_1 \leq M \max(\|\Phi\|, \|\mathcal{F}\|_1),$$

$$M = e^{\alpha\bar{\xi}} \left\{ \alpha \max \left( 1, \gamma(\xi) \left[ 1 + e^{\alpha\bar{\xi}}\bar{\xi}\alpha + e^{\alpha\bar{\xi}}\bar{\xi} \right] \right) + \left( \sum_{j=1}^{m+1} \beta_j \gamma(\xi) + 1 \right) \left[ 1 + e^{\alpha\bar{\xi}}\bar{\xi}\alpha + e^{\alpha\bar{\xi}}\bar{\xi} \right] \right\} + \gamma(\xi) \left[ 1 + e^{\alpha\bar{\xi}}\bar{\xi}\alpha + e^{\alpha\bar{\xi}}\bar{\xi} \right],$$

where  $\gamma(\xi) = \|[Q_*(\xi)]^{-1}\|$ ,  $\alpha = \max_{t \in [0, T]} \|\mathcal{A}(t)\|$ ,  $\beta_j = \max_{t \in [0, T]} \|\mathcal{K}_j(t)\|$ ,  $j = \overline{1, m+1}$ ,  $\bar{\xi} = \max_{s=\overline{1, m+1}} (\xi_s - \xi_{s-1})$ ,  $\|\tilde{u}^*\|_1 = \max_{t \in [0, T]} \|\tilde{u}^*(t)\|$ .

The proof of Theorem 2, with minor modifications, follows the same principles as the proof of Theorem 1.1. in [32].

### 3 Algorithm for numerical solving of problem (9), (10) and (1)–(3)

The proposed numerical algorithm is based on the construction and solving of system (20). The coefficients and the right-hand side of this system (20) are found as solutions to Cauchy problems.

Algorithm for numerical solving of problem (9), (10):

1. Assume we have a partition:  $0 = \xi_0 < \xi_1 < \dots < \xi_m < \xi_{m+1} = T$ . Divide every interval  $[\xi_{s-1}, \xi_s]$ ,  $s = \overline{1, m+1}$ , with step  $h_s = (\xi_s - \xi_{s-1})/l$ ,  $l \in \mathbb{N}$ ,  $s = \overline{1, m+1}$ .

2. To determine the values of matrix  $Q_*(\xi)$  and the vector  $F_*(\xi)$  in system (20) we compute the values  $y_s(\mathcal{A}, h_s)$ ,  $y_s(\mathcal{K}_j, h_s)$ ,  $j = \overline{1, m+1}$ ,  $y_s(\mathcal{F}, h_s)$ ,  $s = \overline{1, m+1}$ , using the Runge Kutta RK4 Method with step size  $h_s$  in each subinterval.

3. Solve the system of linear algebraic equations

$$Q_*^h(\xi)\mu = F_*^h(\xi), \quad \mu \in R^{(N-1)(m+1)}, \tag{21}$$

here  $\tilde{u}^{\tilde{h}_r}(\xi_s) = \mu_s^{\tilde{h}}$ ,  $s = \overline{1, m+1}$ .

4. To define the values of approximate solution at the remaining points, we solve the Cauchy problems

$$\frac{d\tilde{u}}{dt} = \mathcal{A}(t)\tilde{u} + \sum_{j=1}^{m+1} \mathcal{K}_j(t)\mu_j^{\tilde{h}} + \mathcal{F}(t), \quad \tilde{u}(0) = \Phi, \quad t \in [\xi_0, \xi_1], \tag{22}$$

$$\frac{d\tilde{u}}{dt} = \mathcal{A}(t)\tilde{u} + \sum_{j=1}^{m+1} \mathcal{K}_j(t)\mu_j^{\tilde{h}} + \mathcal{F}(t), \quad \tilde{u}(\xi_{s-1}) = \mu_{s-1}^{\tilde{h}}, \quad t \in [\xi_{s-1}, \xi_s], \quad s = \overline{2, m+1}. \tag{23}$$

Solving Cauchy problems (22), (23) also using the Runge Kutta RK4 Method, we obtain a numerical solution to linear initial-boundary value problem for loaded differential equations (9), (10).

If  $\tilde{u}^*(\xi_j^{\tilde{h}}) = (u_1^*(\xi_j^{\tilde{h}}), u_2^*(\xi_j^{\tilde{h}}), \dots, u_{N-1}^*(\xi_j^{\tilde{h}}))'$ ,  $j = \overline{0, (m+1)l}$  is a numerical solution to linear initial value problem for loaded differential equations (9), (10), then  $u^*(\xi_j^{\tilde{h}}, s\tau) = u_s^*(\xi_j^{\tilde{h}})$ ,  $s = \overline{1, N-1}$  will be a numerical solution to linear initial value problem for loaded differential equation of parabolic type (1)–(3).

4 Example

To provide a clear overview of our investigation, we selected a specific test problem. Thus, the numerical method discussed in earlier sections were applied to the following initial-boundary value problem for a loaded parabolic equation

$$\begin{aligned} \frac{\partial u}{\partial t} &= xt \frac{\partial^2 u}{\partial x^2} - (x + 2t)u(t, x) \\ &+ xtu(0.02, x) + 2x^2tu(0.04, x) + (x + t)u(0.06, x) + 4xtu(0.08, x) + 5xt^2u(0.1, x) \\ &+ (4x^3 + 8tx^2 - 8tx)\cos 25\pi t - 100\pi x^2 \sin 25\pi t + \left(2 + \frac{7}{2}x - x^2\right)t^2 + \frac{97}{50}x - \frac{3}{25}x^2 \end{aligned} \quad (24)$$

$$\begin{aligned} &+ \left(8x^4 - \frac{404}{25}x^3 + \frac{31}{25}x^2 + \frac{27}{50}x - \frac{3}{50}\right)t + 1, \quad (t, x) \in (0, 0.1) \times (0, 0.5), \\ &u(0, x) = 4x^2, \quad x \in [0, 0.5], \end{aligned} \quad (25)$$

$$u(t, 0) = t, \quad u(t, \omega) = 2t + \cos 25\pi t, \quad t \in [0, 0.1]. \quad (26)$$

The analytical solution of the given problem (24)–(26) is  $\hat{u}(t, x) = 2xt + 4x^2 \cos 25\pi t + t$ .

We take  $\tau = 0.1$  and produce a discretization by  $x: x_i = i\tau, i = \overline{0, 5}$ . Using this, the problem (24)–(26) is replaced by the following boundary value problem for loaded differential equation

$$\frac{d\tilde{u}}{dt} = \mathcal{A}(t)\tilde{u} + \sum_{j=1}^5 \mathcal{K}_j(t)\tilde{u}(\xi_j) + \mathcal{F}(t), \quad t \in (0, 0.1), \quad (27)$$

$$\tilde{u}(0) = \Phi, \quad \tilde{u} \in \mathbb{R}^4. \quad (28)$$

Here  $\xi_1 = 0.02, \xi_2 = 0.04, \xi_3 = 0.06, \xi_4 = 0.08, \xi_5 = 0.1$ ,

$$\tilde{u} = \begin{pmatrix} u_1(t) \\ u_2(t) \\ u_3(t) \\ u_4(t) \end{pmatrix}, \quad \mathcal{A}(t) = \begin{pmatrix} -22t - 0.1 & 10t & 0 & 0 \\ 20t & -42t - 0.2 & 20t & 0 \\ 0 & 30t & -62t - 0.3 & 30t \\ 0 & 0 & 40t & -82t - 0.4 \end{pmatrix}, \quad \Phi = \begin{pmatrix} 0.04 \\ 0.16 \\ 0.36 \\ 0.64 \end{pmatrix},$$

$$\mathcal{K}_j(t) = \begin{pmatrix} j \cdot 0.1^j \cdot t & 0 & 0 & 0 \\ 0 & j \cdot 0.2^j \cdot t & 0 & 0 \\ 0 & 0 & j \cdot 0.3^j \cdot t & 0 \\ 0 & 0 & 0 & j \cdot 0.4^j \cdot t \end{pmatrix}, \quad j = \overline{1, 2},$$

$$\mathcal{K}_3(t) = \begin{pmatrix} 0.1 + t & 0 & 0 & 0 \\ 0 & 0.2 + t & 0 & 0 \\ 0 & 0 & 0.3 + t & 0 \\ 0 & 0 & 0 & 0.4 + t \end{pmatrix},$$

$$\mathcal{K}_i(t) = \begin{pmatrix} i \cdot 0.1 \cdot t^{i-3} & 0 & 0 & 0 \\ 0 & i \cdot 0.2 \cdot t^{i-3} & 0 & 0 \\ 0 & 0 & i \cdot 0.3 \cdot t^{i-3} & 0 \\ 0 & 0 & 0 & i \cdot 0.4 \cdot t^{i-3} \end{pmatrix}, \quad i = \overline{4, 5},$$

$$\mathcal{F}(t) = \begin{pmatrix} \left(\frac{1}{250} - \frac{18t}{25}\right)\cos 25\pi t - \pi \sin 25\pi t + \frac{617}{50}t^2 - \frac{28t}{3125} + \frac{1491}{1250} \\ \left(\frac{4}{125} - \frac{32t}{25}\right)\cos 25\pi t - 4\pi \sin 25\pi t + \frac{133}{50}t^2 - \frac{59t}{3125} + \frac{1729}{1250} \\ \left(\frac{27}{250} - \frac{42t}{25}\right)\cos 25\pi t - 9\pi \sin 25\pi t + \frac{74}{25}t^2 - \frac{987t}{6250} + \frac{982}{625} \\ \left(\frac{32}{125} + \frac{952t}{25}\right)\cos 25\pi t - 16\pi \sin 25\pi t + \frac{2081}{25}t^2 - \frac{2969t}{6250} + \frac{1098}{625} \end{pmatrix}.$$

To solve linear initial value problem for loaded differential equations (27), (28) we will use the algorithm of Dzhumabaev parameterization method. According to the scheme of this method, the interval  $[0, 0.1)$  is partitioned into subintervals by loading points:  $[0, 0.1) = \bigcup_{s=1}^5 [\xi_{s-1}, \xi_s)$ . Using the above proposed algorithm, we compose system (21) and by solving this system (21) we find the numerical values of the unknown parameters  $\mu$ :

$$\mu_1 = \begin{pmatrix} 0.02399999 \\ 0.02799997 \\ 0.03199992 \\ 0.03599988 \end{pmatrix}, \mu_2 = \begin{pmatrix} 0.00799998 \\ -0.10400007 \\ -0.29600015 \\ -0.56800025 \end{pmatrix}, \mu_3 = \begin{pmatrix} 0.07199999 \\ 0.08399997 \\ 0.09599992 \\ 0.10799986 \end{pmatrix},$$

$$\mu_4 = \begin{pmatrix} 0.136 \\ 0.272 \\ 0.488 \\ 0.78400001 \end{pmatrix}, \mu_5 = \begin{pmatrix} 0.11999999 \\ 0.13999996 \\ 0.15999993 \\ 0.17999994 \end{pmatrix}.$$

We find the values of approximate solution at the remaining points of the subintervals of problem (27), (28) by solving Cauchy problems (22), (23). Then  $u^*(\xi_j^h, s\tau) = u_s^*(\xi_j^h)$ ,  $s = \overline{1, 4}$ ,  $j = \overline{0, 50}$ ,  $\tau = 0.1$ , will be a numerical solution to linear boundary value problem for loaded differential equation of parabolic type (24)–(26).

The graph of the exact solution  $\hat{u}(t, x)$  and the found numerical solutions  $u^*(t, x)$  of the boundary value problem for a parabolic equation (24)–(26) are shown in Figure.

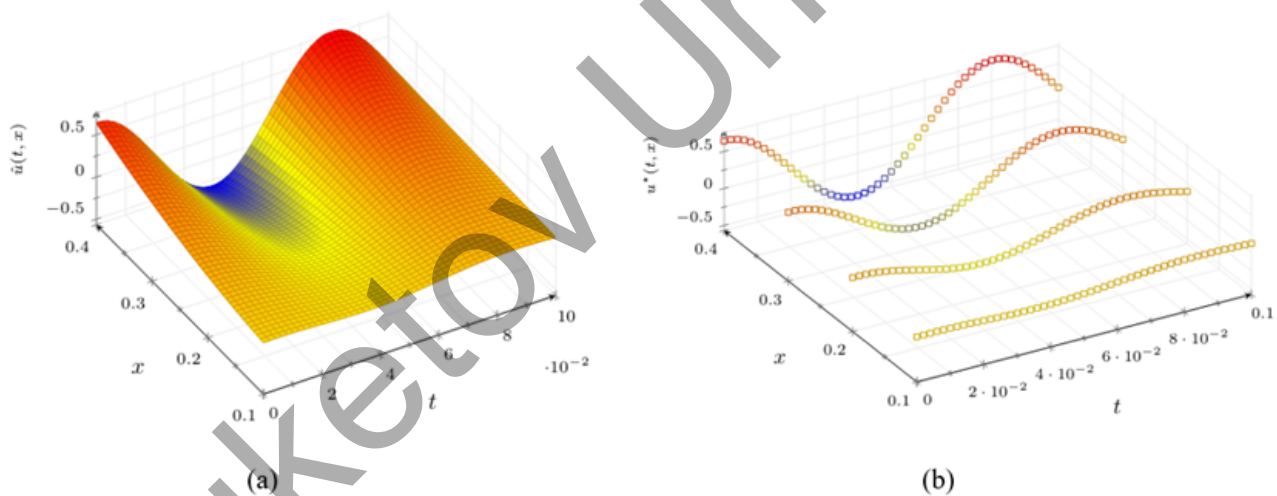


Figure. Exact (a) and numerical (b) solutions for example

For the difference of the corresponding values of the exact  $\hat{u}(t, x)$  and constructed solutions  $u^*(t, x)$  of the boundary value problem for a parabolic equation (24)–(26) the following estimate is true:

$$\max_{j=0,50, i=1,4} \|\hat{u}(\xi_j^h, x_i) - u^*(\xi_j^h, x_i)\| < 0.0000003.$$

*Conclusion*

The initial-boundary value problem for a loaded parabolic equation in a rectangular domain is investigated. Using discretization with respect to the variable  $x$ , the problem under consideration is reduced to the initial problem for a system of loaded ordinary differential equations. Using the

results of works [12, 13], an estimate for the solution of the initial-boundary value problem for a loaded parabolic equation is established. The parameterization method is used to solve the initial problem for a system of loaded ordinary differential equations. Algorithms for finding a solution to the problem under study are constructed and their convergence is shown. Conditions for the unique solvability of the initial problem for a system of loaded ordinary differential equations are established. Further, the proposed approach will be applied to solving boundary value problems for a loaded parabolic equation.

#### *Acknowledgments*

The authors thank the referees for his/her careful reading of the manuscript and useful suggestions.

#### *Funding information*

This research is funded by the Science Committee of the Ministry of Science and Higher Education of the Republic of Kazakhstan (Grant No. AP19675193).

#### *Author Contributions*

All authors contributed equally to this work.

#### *Conflict of Interest*

This work does not have any conflicts of interest.

#### References

- 1 Nakhushev, A.M. (1995). *Uravneniia matematicheskoi biologii [Equations of mathematical biology]*. Nalchik: Vysch.sh. [in Russian].
- 2 Friedman, A. (2008). *Partial Differential Equations of Parabolic Type*. Dover Publications.
- 3 Tian, Y., & Weng, P. (2009). Spreading speed and wavefronts for parabolic functional differential equations with spatio-temporal delays *Nonl. Anal.: Theory, Meth. Appl.*, 71, 3374–3388.
- 4 Knabner, P., & Angermann, L. (2021). *Numerical Methods for Elliptic and Parabolic Partial Differential Equations*. Springer Cham.
- 5 Tikhonov, A.N. (2013). *Equations of Mathematical Physics*. Courier Corporation.
- 6 Nakhushev, A.M. (2012). *Nagruzhennye uravneniia i ikh primenenie [Loaded equations and their applications]*. Moscow: Nauka [in Russian].
- 7 Dzhenaiev, M.T., & Ramazanov, M.I. (2010). *Nagruzhennye uravneniia kak vozmushcheniia differentsialnykh uravnenii [Loaded equations as perturbations of differential equations]*. Almaty: Fylym [in Russian].
- 8 Jenaliyev, M.T., & Kassymbekova, A.S. (2018). On the boundary value problem for the loaded parabolic equations with irregular coefficients. *Bulletin of the Karaganda University. Mathematics Series*, 1(89), 20–27. <https://doi.org/10.31489/2018m1/20-27>
- 9 Jaruszewska-Walczak, D. (2012). Monotone iterative methods for infinite systems of parabolic functional differential equations. *Nonl. Anal.: Theory, Meth. Appl.*, 75(10), 4051–4061. <https://doi.org/10.1016/j.na.2012.02.021>
- 10 Attaev, A.Kh., Ramazanov, M.I., & Omarov, M.T. (2022). On the correctness of boundary value problems for the two-dimensional loaded parabolic equation. *Bulletin of the Karaganda university. Mathematics Series*, 4(108), 34–41. <https://doi.org/10.31489/2022m/34-41>

- 11 Akhmanova, D.M., Shamatayeva, N.K., & Kasymova, L.Zh. (2020). On boundary value problems for essentially loaded parabolic equations in bounded domains. *Bulletin of the Karaganda University. Mathematics Series*, 2(98), 6–14. <https://doi.org/10.31489/2020m2/6-14>
- 12 Dzhumabaev, D.S. (1983). Obosnovanie metoda lomanykh dlia odnoi kraevoi zadachi lineinogo parabolicheskogo uravneniia [Substantiation of the poliline method for a single boundary value problem of a linear parabolic equation]. *Izvestiia AN KazSSR. Serii fiziko-matematicheskaiia – News of the Academy of Sciences of the Kazakh SSR. Physics and Mathematics Series*, 1, 8–11 [in Russian].
- 13 Assanova, A.T., & Dzhumabaev, D.S. (2000). Ob otsenkakh reshenii i ikh proizvodnykh kraevoi zadachi dlia parabolicheskogo uravneniia [On estimates of solutions and their derivatives of the boundary value problem for the parabolic equation]. *Izvestiia MON RK, NAN RK. Serii fiziko-matematicheskaiia – News of the Ministry of Education and Science of the Republic of Kazakhstan, National Academy of Sciences of the Republic of Kazakhstan. Physics and Mathematics Series*, 5, 3–8 [in Russian].
- 14 Ashyralyev, A., Ashyralyev, C., & Ahmed, A.M.S. (2023). Numerical solution of the boundary value problems for the parabolic equation with involution. *Bulletin of the Karaganda University. Mathematics Series*, 1(109), 48–57. <https://doi.org/10.31489/2023m1/48-57>
- 15 Assanova, A.T., Bakirova, E.A., & Kadirbayeva, Zh.M. (2019). Numerically approximate method for solving of a control problem for integro-differential equations of parabolic type. *News of the NAS RK. Phys.-Math. Series*, 6(328), 14–24. <https://doi.org/10.32014/2019.2518-1726.69>
- 16 Dehghan, M. (2003). Numerical solution of a parabolic equation with non-local boundary specifications. *Applied Mathematics and Computation*, 145(1), 185–194. [https://doi.org/10.1016/S0096-3003\(02\)00479-4](https://doi.org/10.1016/S0096-3003(02)00479-4)
- 17 Ignjatovic, M. (2015). On solving parabolic equation with homogeneous boundary and integral initial conditions. *Matematički Vesnik*, 4, 258–268.
- 18 El-Gamel, M., El-Baghdady, G.I., & El-Hady, M.A. (2022). Highly Efficient Method for Solving Parabolic PDE with Nonlocal Boundary Conditions. *Applied Mathematics*, 13, 101–119. <https://doi.org/10.4236/am.2022.132009>
- 19 Dzhumabaev, D.S. (1982). Ob odnom metode issledovaniia obyknovennykh differentsialnykh uravnenii [About one method of investigating ordinary differential equations]. *Izvestiia AN KazSSR. Serii fiziko-matematicheskaiia – News of the Academy of Sciences of the Kazakh SSR. Physics and Mathematics Series*, 3, 1–4 [in Russian].
- 20 Dzhumabaev, D.S. (2016). On one approach to solve the linear boundary value problems for Fredholm integrodifferential equations. *J. Comput. Appl. Math*, 294, 342–357. <http://dx.doi.org/10.1016/j.cam.2015.08.023>
- 21 Assanova, A.T., Imanchiyev, A.E., & Kadirbayeva, Zh.M. (2020). A nonlocal problem for loaded partial differential equations of fourth order. *Bulletin of the Karaganda University. Mathematics Series*, 1(97), 6–16. <https://doi.org/10.31489/2020m1/6-16>
- 22 Bakirova, E.A., Kadirbayeva, Zh.M., & Tleulesova, A.B. (2017). On one algorithm for finding a solution to a two-point boundary value problem for loaded differential equations with impulse effect. *Bulletin of the Karaganda University. Mathematics Series*, 3(87), 43–50. <https://doi.org/10.31489/2017m3/43-50>
- 23 Kadirbayeva, Zh.M., & Dzhumabaev, A.D. (2020). Numerical implementation of solving a control problem for loaded differential equations with multi-point condition. *Bulletin of the Karaganda University. Mathematics Series*, 4(100), 81–91. <https://doi.org/10.31489/2020m4/81-91>
- 24 Uteshova, R., Kadirbayeva, Z., Marat, G., & Minglibayeva, B. (2022). A novel numerical im-

- plementation for solving problem for loaded depcag. *International Journal of Mathematics and Physics*, 13(2), 50–57. <https://doi.org/10.26577/ijmph.2022.v13.i2.07>
- 25 Dzhumabayev, D. (1989). Criteria for the unique solvability of a linear boundary-value problem for an ordinary differential equation. *U.S.S.R. Comp. Math. Math. Phys.*, 29(1), 34–36.
- 26 Assanova, A.T., Iskakova, N.B., & Orumbayeva, N.T. (2018). Well-posedness of a periodic boundary value problem for the system of hyperbolic equations with delayed argument. *Bulletin of the Karaganda University. Mathematics Series*, 1(89), 8–14. <https://doi.org/10.31489/2018m1/8-14>
- 27 Assanova, A.T., Imanchiyev, A.E., & Kadirbayeva, Zh.M. (2019) Solvability of nonlocal problems for systems of Sobolev-type differential equations with a multipoint condition. *Russian Mathematics*, 63(12), 1–12. <https://doi.org/10.3103/S1066369X19120016>
- 28 Assanova, A.T., Kadirbayeva, Zh.M., Medetbekova, R.A., & Mynbayeva, S.T. (2024). Problem for differential-algebraic equations with a significant loads. *Bulletin of the Karaganda University. Mathematics Series*, 1(113), 46–59. <https://doi.org/10.31489/2024m1/46-59>
- 29 Bakirova, E.A., Assanova, A.T., & Kadirbayeva, Zh.M. (2021). A problem with parameter for the integro-differential equations. *Mathematical Modelling and Analysis*, 26(1), 34–54. <https://doi.org/10.3846/mma.2021.11977>
- 30 Abdimanapova, P.B., & Temesheva, S.M. (2023). Well-posedness criteria for one family of boundary value problems. *Bulletin of the Karaganda University. Mathematics Series*, 4(112), 5–20. <https://doi.org/10.31489/2023m4/5-20>
- 31 Bakirova, E.A., Iskakova, N.B., & Kadirbayeva, Z.M. (2023). Numerical implementation for solving the boundary value problem for impulsive integro-differential equations with parameter *KazNU Bulletin. Mathematics, Mechanics, Computer Science Series*, 119(3), 19–29. <https://doi.org/10.26577/JMMCS2023v119i3a2>
- 32 Assanova, A.T., Imanchiev A.E., & Kadirbayeva, Zh.M. (2018). Numerical solution of systems of loaded ordinary differential equations with multipoint conditions. *Computational mathematics and mathematical physics*, 58(4), 508–516. <https://doi.org/10.1134/S096554251804005X>

#### Author Information\*

**Anar Turmaganbetkyzy Assanova** — Doctor of physical and mathematical sciences, Professor, Head of the Department of Differential Equations and Dynamical Systems, Institute of Mathematics and Mathematical Modeling, 28 Shevshenko street, Almaty, 050010; Professor of Department of Mathematics, Kazakh National Women’s Teacher Training University, 99 AYTEKE BI STREET, Almaty, 050026, Kazakhstan; e-mail: [assanova@math.kz](mailto:assanova@math.kz); <https://orcid.org/0000-0001-8697-8920>

**Zhazira Muratbekovna Kadirbayeva** (corresponding author) — Candidate of physical and mathematical sciences, Associate Professor, Chief Researcher of the Department of Differential Equations and Dynamical Systems, Institute of Mathematics and Mathematical Modeling, 28 Shevshenko street, 050010; Associate Professor of Department of Mathematics, Kazakh National Women’s Teacher Training University, 99 AYTEKE BI STREET, Almaty, 050026, Kazakhstan; e-mail: [zhkadirbayeva@gmail.com](mailto:zhkadirbayeva@gmail.com); <https://orcid.org/0000-0001-8861-4100>

**Saule Kaldarbekovna Kuanysh** — Doctoral student, Teacher at the Department of Mathematics, Al-Farabi Kazakh National University, 71/23 Al-Farabi Avenue, Almaty, 050040, Kazakhstan; e-mail: [saule270898@gmail.com](mailto:saule270898@gmail.com); <https://orcid.org/0009-0006-0975-1662>

\*The author’s name is presented in the order: First, Middle and Last Names.